

# Oil-Tight Casing Order Form


Customer \_\_\_\_\_  
 Order/Drawing No \_\_\_\_\_

Date \_\_\_\_\_  
 Quantity \_\_\_\_\_

Item	Description	Dimension
<b>CD</b>	Center Distance	
<b>S</b>	Driven sprocket O.D.	
	Bore Size of "S"	
<b>S1</b>	Drive sprocket O.D.	
	Bore Size of "S1"	
<b>R</b>	Casing radius-driven $(OD/2) + 2\ 1/2"$	
<b>R1</b>	Casing radius-drive $(OD/2) + 2\ 1/2"$	
<b>W</b>	Length of Longest Hub Plus 1-1/2" for Opening on One Side, 2" for Opening on Both Sides of Casing	
<b>T</b>	Take up - One Chain Pitch	
<b>V</b>	Vertical location	
<b>H</b>	Horizontal location	

### SPROCKET POSITION DIAGRAM

1. Shade driven sprocket position.
2. Horizontal take up is standard. Note if different take up is required.

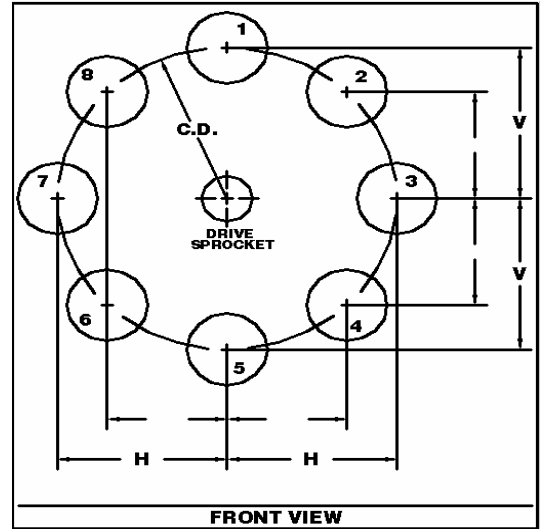

Casing Type	
Type I	
Type II	
Type III	
Other	

Material	
Carbon Steel	
Stainless Steel	
Aluminum	
Other	

Finish	
None	
Prime Paint	
Safety Yellow	
Other	

**MARK CORRECT TOP VIEW OF CASING FOR REQUIRED SHAFT ARRANGEMENT**

**A**

**B**

**C**

**D**

**E**

**F**

**G**

**H**

**J**

**TOP VIEW**

